

EACIL20-MR

Intel® Pentium® N4200 Marine Computer



KEY FEATURES

- Intel® Apollo Lake N4200 Computer
- Fanless cooling system
- Compact size 100 x 70 x 31 mm(w/o mounting bracket)
- Expansion module design
- Various mounting options: desk, wall, VESA, DIN-Rail




SPECIFICATIONS

System Specification			
Processor	Intel Celeron N3350 1.1GHz (up to 2.4GHz) Intel Pentium N4200 1.1GHz (up to 2.5GHz) (Optional)	Memory	4GB LPDDR4
Storage	eMMC: Onboard 32 GB eMMC: Onboard 64 GB (Optional) eMMC: Onboard 128 GB (Optional) mSATA SSD 128GB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)
WLAN	Support (Optional)	BT	Support (Optional)
WWAN	WWAN (Optional)	Expansion Port	EACWSLT-222 WWAN Expansion Board (Single SIM Slot) EACWSLT-231 3-port RS232/422/485 (Default RS232) w/ isolation EACWSLT-232 16-Channel Digital I/O w/ isolation EACWSLT-233 2-port CANBUS w/ isolation EACWLST-234 3 -port USB 2.0 EACWLST-235 2-port RS232/422/485 (Default RS232) w/ isolation EACWLST-236 2-port Giga-LAN EACWLST-237 WWAN Expansion Board (Dual SIM Slot)
Mechanical			
Dimension	100 (W) x 70 (H) x 31(D) mm(One layer) 100 (W) x 70 (H) x 61(D) mm(Double layer)	Weight	0.4 kg (One layer), 0.5 kg (Double layer)
Mounting	Desk Mounting and Wall Mounting VESA Mount (Optional) DIN-Rail Mount (Optional)	Enclosure	Metal Housing
Cooling System	Fanless design		
Environment			
Operating Humidity	30% to 90% RH, Non-Condensing	Operating Temperature	0°C to 55°C
Storage Temperature	-15°C to 70°C	Shock	Operating, IEC 60068-2-27
Vibration	Operating, IEC 60068-2-64	IP rating	IP30
Certification			
Certification	CE, FCC DNVGL-CG-0339		

IO Ports			
Power Input	1 x 9~36V DC, 2-Pin Terminal Block	USB Port	2 x USB3.2 Gen1x1 (Type-A)
Video	1 x HDMI 1.4 (Optional)	Expansion Port	mPCIe: 1 x Full-size mPCIe slot USB Wafer : 2 x USB2.0 Wafer
LAN	2 x Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power
mini PCIe	1 x Mini PCIE		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	Quick Start Guide Terminal Block 2 Pin to 2.5Ø Female Adapter Cable 2 Pin Terminal Block Connector Open Wire DC Cable WLAN External Antenna (For WLAN sku) WWAN External Antenna (For WWAN sku) AC to DC Adapter 12V/36W (Optional) VESA Mounting Kit (Optional) DIN Rail Mounting Kit (Optional)		
Power			
Power Rating	9V~36V DC, 2-Pin Terminal Block	Adapter	12V 36W
Ordering Information			
Option	EACWSLT-222 WWAN Expansion Board (Single SIM Slot) (Optional) EACWSLT-231 3-port RS232/422/485 (Default RS232) w/ isolation (Optional) EACWSLT-232 16-Channel Digital I/O w/ isolation (Optional) EACWSLT-233 2-port CANBUS w/ isolation (Optional) EACWSLT-234 4-port USB 2.0 (Optional) EACWSLT-235 2-port RS232/422/485 (Default RS232) w/ isolation (Optional) EACWSLT-236 2-port Giga-LAN (Optional) EACWSLT-237 WWAN Expansion Board (Dual SIM Slot) (Optional)		

DIMENSIONS UNIT:MM

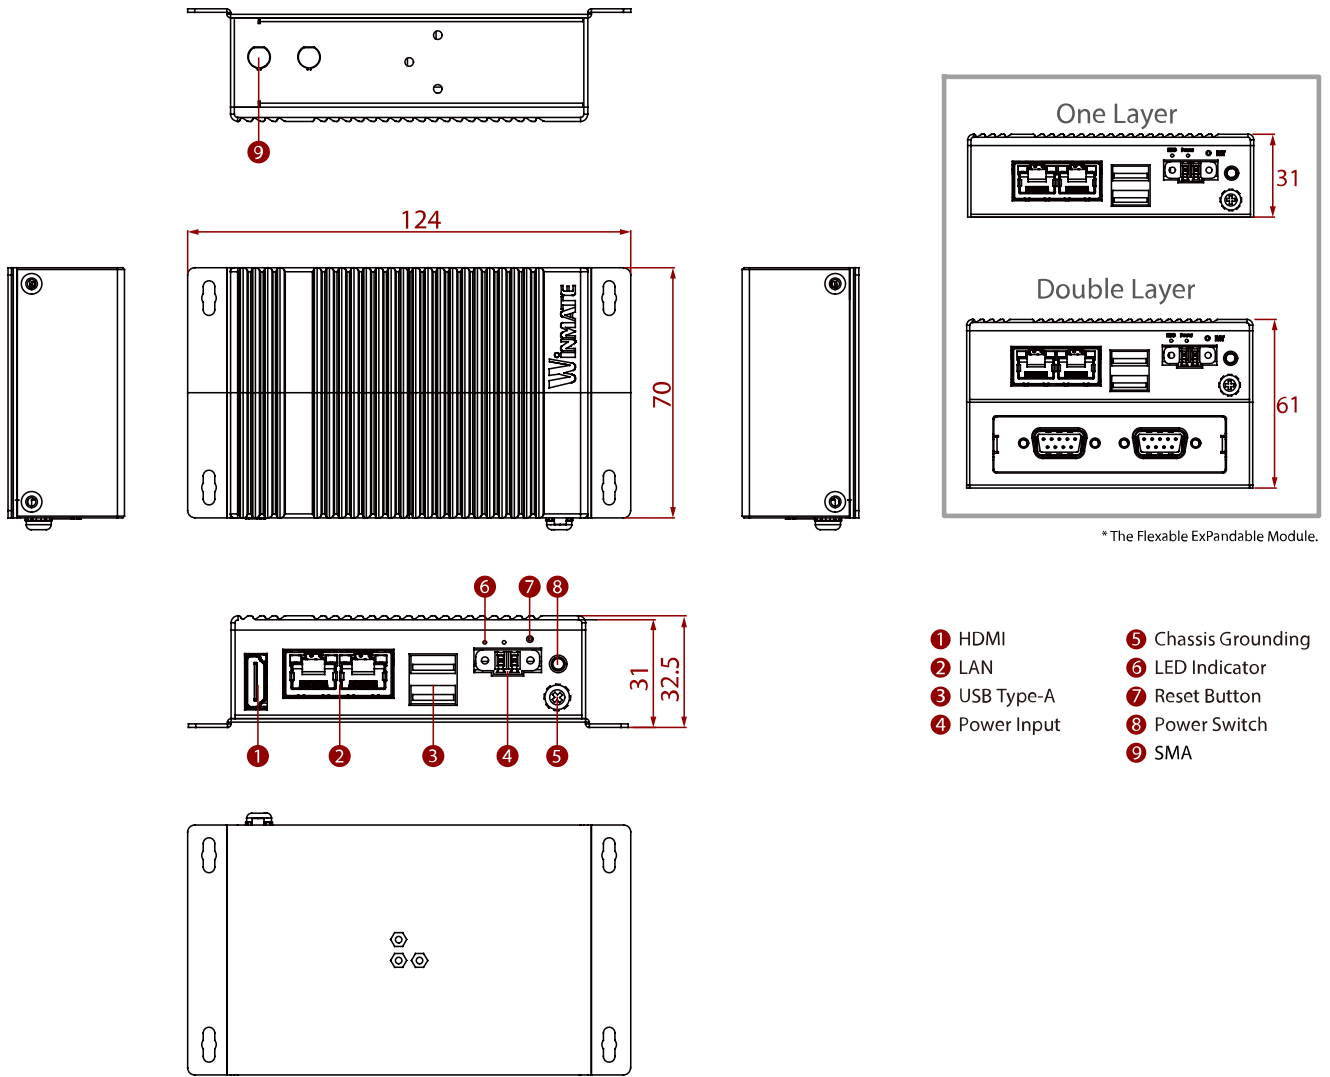

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.